

Tow-Trust Towbars

Important: Please read General Notes overleaf before fitting Issue: 2



TKIA5ASN Kia Sorrento Mk6 2020> & Hyundai Santa Fe (TMA) 2021>


Item	Otto	Description	Item	Otty	Description
пеш	Qty	Description	пеш	Qty	Description
Α	1	TKIA5A Crossbar	F	1	VASP8 L/H Socket Plate
B1	1	Left Hand Upper Side Arm Bracket	G	2	15mm Spacer Plates
B2	1	Right Hand Upper Side Arm Bracket	Н	2	M12 x 110 Bolts (10.9) & Nyloc Nuts
C1	1	Left Hand Lower Side Arm	J	10	M10 x 40 Bolts (10.9) & S/P Washers
C2	1	Right Hand Lower Side Arm	K	6	M12 x 40 x 1.25 Bolts & S/P Washers
D	1	Spacer Plate (Hybrid Only)	L	10	10 x 30 Flat Washers
Е	1	ACS5 / 9205 Swan Neck	М	8	12 x 25 Flat Washers
			N	2	12 x 30 Flat Washers

Preparation For Installation

- 1. Lower the spare wheel.
- 2. Remove the central bumper tag from the rear impact beam and discard. Then cut the tag off the bumper. (Fig:1)
- 3. Lower and support the AdBlue tank.
- 4. Lower and support the exhaust silencer. **Note:** The rearmost rubber must be removed from the silencer and not the vehicle.

Towbar Installation.

- 1. Using Items J with Items L fit Item B1 to Item C1 and Item B2 to Item C2 creating side arm assemblies. (Fig:2)
- 2. Loosely fit Item K with Item N a couple of turns into each chassis vertical mounting point this will be used to slide the side arm on and support.
- 3. Using Items K with Items M loosely fit the side arm assemblies to each chassis member. (Fig:4) Hybrid Models: Item D must be fitted. (Fig:2)
- 4. Fix Item A to the side arm assemblies using Items J with Items L.
- 5. Fix Item E and Item F to Item A using Items H with Items M and Items G to the correct position (Fig:3)
- 6. Fully tighten all fixings ensuring the Towbar is rigid, square and secure. (Fig:4)
- **7.** Raise the spare wheel.

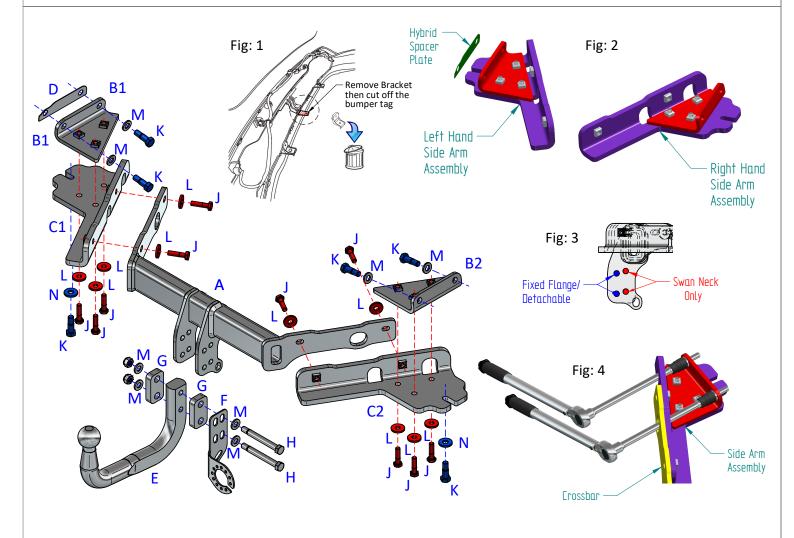

Notes:

- **1.** For Torque settings see general notes overleaf.
- 2. Nose load limits and vehicle manufacturer's trailer / caravan weight limits must be observed.