

## **Tow-Trust Towbars**

Important: Please read General Notes overleaf before fitting Issue: 1



TVW22VK Skoda Kamiq 2019>, Seat Arona 2017>, Volkswagen T-Cross 2019>


Item	Qty	Description	Item	Qty	Description
Α	1	TVW22 Crossbar	F	2	M12 x 22 Bolts & S/P Washers
B1	1	Left Hand Side Arm	G	2	M12 x 25 Bolts & S/P Washers
B2	1	Right Hand Side Arm	Н	4	M6 x 20 Self Tapping Bolts
С	2	Kamiq Spacer	J	4	M12 x 35 Bolts & S/P Washers
D	1	6216 Detachable	К	4	M12 x 45 Bolts & Nyloc Nuts
E	1	TTFP/RH	L	4	6 X 15 Flat Washers
			М	8	12 x 25 Flat Washers
Х		OEM GSM Ariel	N	4	12 x 30 Flat Washers

## **Bumper Removal:**

- 1. Open tailgate and remove light clusters, one fixing behind boot trim panel each side.
- 2. Remove the three fixings from the wheel arch liner and mudguards if fitted and the tip screw from each side.
- **3.** Remove the nine fixings from the lower bumper edge.
- 4. Pull bumper out sideways and release clips from under the light clusters pull rearwards, unplug the reversing sensors and number plate lights and fully remove. Note: (Volkswagen T-Cross requires a new lower bumper panel, Part Number 2GM 807 521B)
- **5.** Remove item **X**, one fixing from off the rear crash beam if fitted, then remove the crash beam, seven fixings. Note: (This will not be refitted with the towbar assembly). Refit the fixings into the rear panel to prevent water ingress.
- **6.** Separate the charcoal cannister from the offside chassis to gain access to the mounting point, two fixings.

## **Towbar Installation:**

- 1. Loosely fix items **B1** and **B2** to the correct chassis rail using items **J** with items **N** on the correct setting for the vehicle. (Figure 1)
- 2. Loosely fix item A to items B1 and B2 (with item C on Skoda Kamiq in between) using items K with items M.
- 3. Loosely fix item D and item E to item A on the correct setting (Figure 2) using items F with items M and items G and items M.
- **4.** Fully tighten all the fixings ensuring the Towbar is rigid, square and secure.
- 5. If applicable remount item X to item A using items H and items L.
- 6. Remount the charcoal canister and rear bumper. Note: (Some models may require pre-marked cut to be removed from bumper).

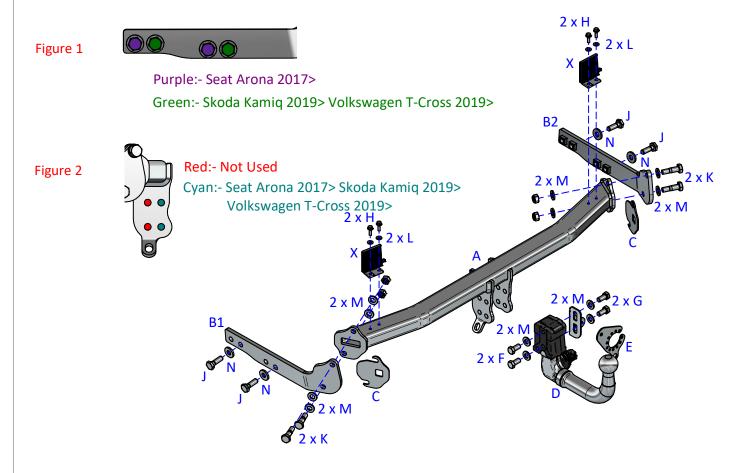

## Notes:

- 1. For Torque settings see general notes overleaf.
- 2. Nose load limits and vehicle manufacturer's trailer / caravan weight limits must be observed.
- 3. We recommend the use of PRO-TOW Couplings with all our products.